



Because Privacy Matters



Kubebooth Technical Data Sheet - Ki



Easy to Install

Size

Overall - W: 44" - D: 37" - H: 88"
Inside - W: 36" - D: 36" - H: 80"

Weight

800 lbs/362 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panel - H: 88" x W: 12"

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit


Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

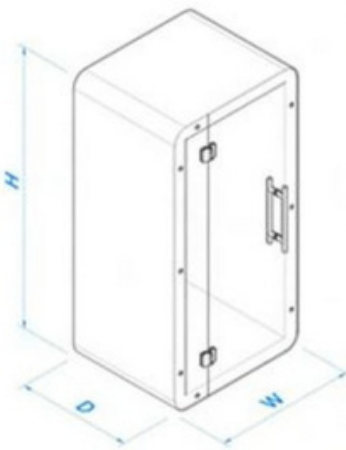

Power Cord

100" cord 120V/15Amp

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified (zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall II or equal
Solution dyed polypropylene 28 oz, 10 gauge
GreenGuard certified GLP8472 <450 NBS smoke

Floor Ceiling

Substructure rated MDF on unitized steel base

Reversible Door

Fully interchangeable left or right opening

Worktop

White laminate wood worktop W: 20" x L: 12"
Installed at an optimum height of 40"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights



*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9