



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kme



Easy to Install

Size Overall - W: 88" - D: 37" - H: 80"
88" Inside - W: 80" - D: 36" - H: 80"
Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Weight

1200 lbs/544 kg

Glass 10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Moveable

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector
(controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for
3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

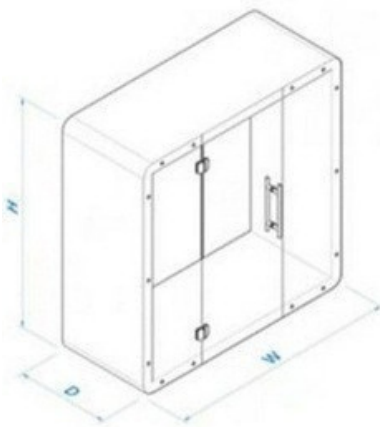

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified (zero/low formaldehyde
emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Reversible Door

Fully interchangeable left or right opening

Floor Ceiling


Substructure-rated MDF on unitized steel
base.

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

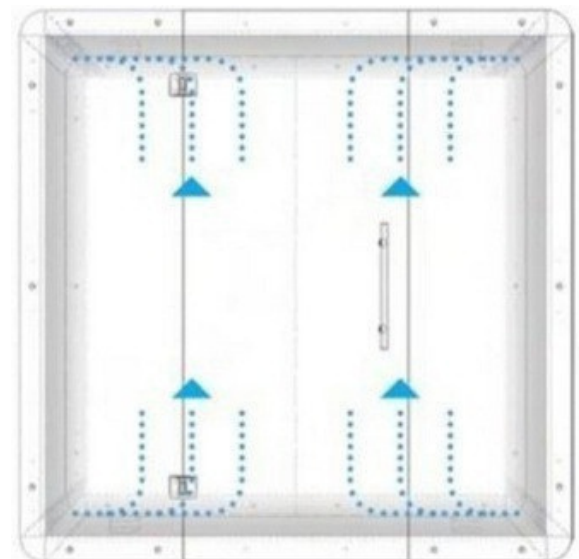

*Air Flow Diagram

