



Because privacy matters!™

ISO 9001:2015 CERTIFIED COMPANY ISO 14001:2015 CERTIFIED COMPANY



# Kubebooth Technical Data Sheet KSelfi

Note: This is only a sample Size. Various Sizes exists to fit your needs

## Easy to Install

### Size

Overall - W: 44" - D: 37" - H: 88"  
Inside - W: 36" - D: 36" - H: 80"

### Weight

800 lbs/362 kg

### Glass

10mm clear tempered  
Ceramic painted borders  
Door - H: 88" x W: 32"  
Rear Panel - H: 88" x W: 44"  
Front Side Panel - H: 88" x W: 12"

## Moveable

### Acoustics

NIC rating of 36 dB certified  
Noise cancellation technology

### Air Exchange

100 air exchanges per hour

### Data Center

1 USB A port, 1 USB C port  
2 Simplex outlets Motion detector  
(controls light & fan)

## Plug & Play

### Mobility Kit

Includes casters with fasteners

### Light


12V LED light bar with magnet  
570mm/pcs super light bar, 3500K,  
12VDC

### Sprinkler

Pre-engineered knockout hole for 3rd  
party sprinkler installation

### UL Certified

The electric connections in this  
pod are UL certified for safety and  
reliability

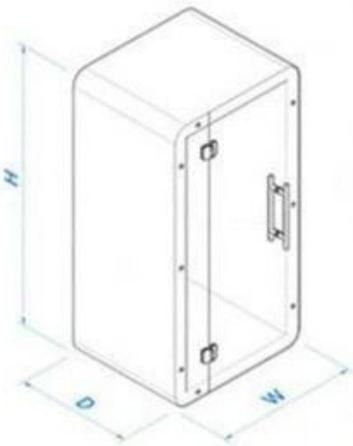

### Power Cord

10ft cord 120V/15Amp

### Wall Construction

Galvanized steel frames  
Sound insulation in all cavities

### Finishes

D-pull handle  
TFL surface  
CARB certified (zero/low formaldehyde  
emissions)  
Aluminum hardware painted

### Carpet

Shaw Commercial Philadelphia Ayers Hall  
II or equal  
Solution dyed polypropylene 28 oz, 10  
gauge  
GreenGuard certified GLP8472 <450 NBS  
smoke

### Floor Ceiling

Substructure rated MDF on unitized steel base

### Reversible Door

Fully interchangeable left or right opening

### Worktop

White or black laminate wood worktop  
W: 20" x L: 12"  
Installed at an optimum height of 40"

### Felt


Interior sound absorption panels  
60% recyclable

### Options

Seismic bracing  
One touch LCD control panel  
LCD TV mount bracing  
White glass board - W: 34" x L: 30"  
Personalized company branding  
Ethernet ports  
Bluetooth speaker  
Frosted film glass  
External fire extinguisher unit  
Occupancy lights  
Height Adjustable Worktop

### IMPORTANT BUILDING / SPRINKLER NOTE

All units include a sprinkler "knockout" provision. Final requirements vary by jurisdiction and building conditions, customers must confirm the required approach with their building inspector / AHJ (Authority Having Jurisdiction) before installation.

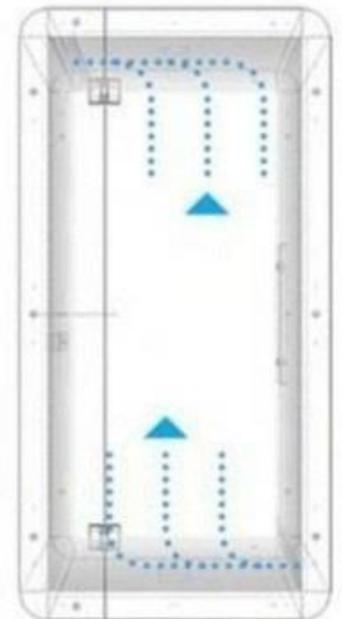

\*Air Flow Diagram

