



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi



Easy to Install

Size
Overall - W: 44" - D: 37" - H: 88"
Inside - W: 36" - D: 36" - H: 80"

Weight
800 lbs/362 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panel - H: 88" x W: 12"

Moveable

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 air exchanges per hour


Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler
Pre-engineered knockout hole for 3rd
party sprinkler installation

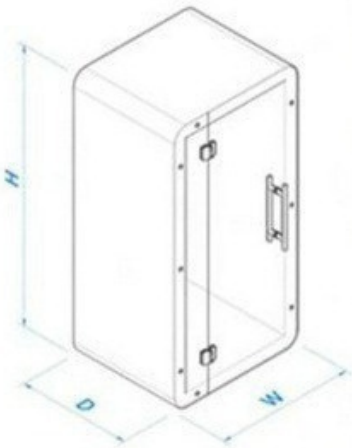

Power Cord
10ft cord 120V/15Amp

Wall Construction
Galvanized steel frames
Sound insulation in all cavities

Finishes
D-pull handle
TFL surface
CARB certified (zero/low formaldehyde
emissions)
Aluminum hardware painted

Carpet
Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke


Reversible Door
Fully interchangeable left or right opening

Worktop
White or black laminate wood worktop
W: 20" x L: 12"
Installed at an optimum height of 40"

Felt
Interior sound absorption panels
60% recyclable

Options
Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Floor Ceiling
Substructure rated MDF on unitized steel base

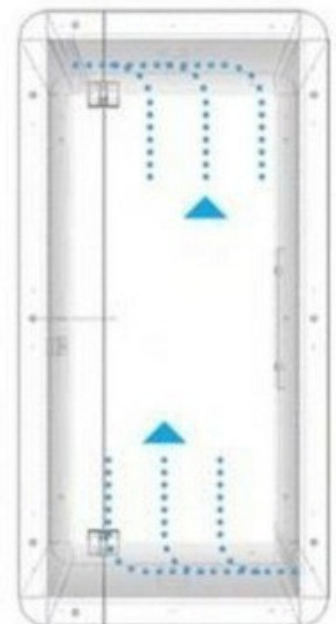

*Air Flow Diagram

