



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi Plus



Easy to Install

Size Overall - W: 56" - D: 48" - H: 88"
Inside - W: 48" - D: 47" - H: 80"

Weight
1000 lbs/453 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Front Side Panels - H: 88" x W: 12"

Moveable

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)


Plug & Play

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler Pre-engineered knockout
hole installation 3rd party sprinkler

Power Cord
10ft cord 120V/15Amp

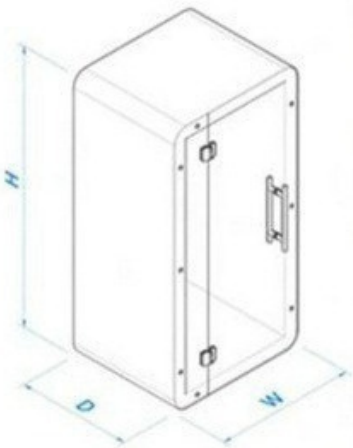

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Floor Ceiling

Substructure rated MDF on unitized steel base


Reversible Door

Fully interchangeable left or right opening

Felt Interior sound absorption
panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel LCD
TV mount bracing
White glassboard - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

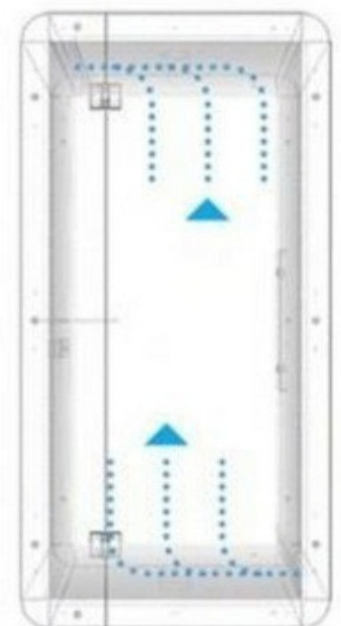

*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9