



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY




Kubebooth Technical Data Sheet - KSelfi Plus

Easy to Install

Size Overall - W: 56" - D: 48" - H: 88"
Inside - W: 48" - D: 47" - H: 80"

Weight
1000 lbs/453 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Front Side Panels - H: 88" x W: 12"

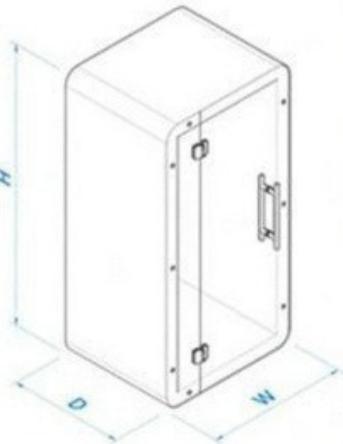

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Floor Ceiling

Substructure rated MDF on unitized steel base

Moveable

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Reversible Door

Fully interchangeable left or right opening

Felt Interior sound absorption
panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glassboard - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass External fire
extinguisher unit
Occupancy lights
Height Adjustable Worktop


Plug & Play

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler Pre-engineered knockout
hole installation 3rd party sprinkler

Power Cord
10ft cord 120V/15Amp

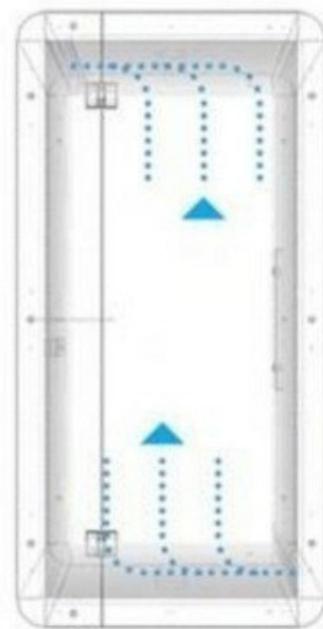

*Air Flow Diagram