



Because privacy matters!™

ISO 9001:2015 CERTIFIED COMPANY ISO 14001:2015 CERTIFIED COMPANY



Kubebooth Technical Data Sheet KSelfi Plus Floorless

Note: This is only a sample Size. Various Sizes exists to fit your needs

Easy to Install

Size Overall - W: 56" - D: 48" - H: 88"
Inside - W: 48" - D: 47" - H: 84"

Weight
950 lbs/431 kg

Glass
10mm clear tempered
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 12"
*Panel includes 2 piece glass

Plug & Play

Acoustics Class A noise reduction

Air Exchange
100 complete air changes per hour

Data Center
1 USB A port, 1 USB C port,
2 Simplex outlets
Motion detector (controls light & fan)

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler
Pre-engineered knockout hole for 3rd
party sprinkler installation



Door Lock

Patch fit low noise- silent latch

Reversible Door

Fully interchangeable left or right opening

Felt Interior sound absorption
panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights
Height Adjustable Table

Power Cord 10ft cord 120V/15Amp

Wall Construction


Galvanized steel frames
Sound insulation in all cavities

Finishes

TFL surface CARB certified (zero/low
formaldehyde emissions) Aluminum
hardware painted

IMPORTANT BUILDING / SPRINKLER NOTE

All units include a sprinkler "knockout" provision.
Final requirements vary by jurisdiction and
building conditions, customers must confirm
the required approach with their building
inspector / AHJ (Authority Having Jurisdiction)
before installation.

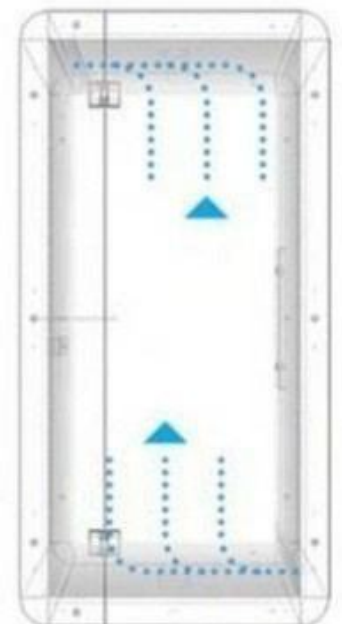

*Air Flow Diagram

Note: For your safety and optimal performance, this pod must be
securely drilled to the floor during installation.



| www.Kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9