



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 4

Extendable

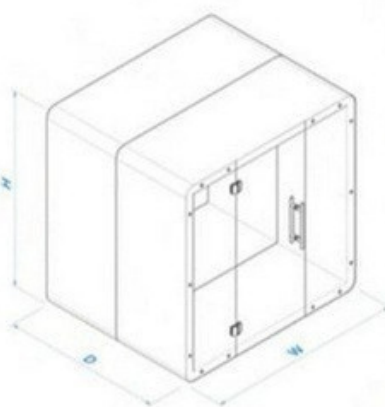

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel
base.

Easy to Install

Size Overall - W: 88" - D: 73" - H: Acoustics

88" Inside - W: 80" - D: 72" - H: NIC rating of 36 dB certified

80"

Weight

1800 lbs/816 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D Shape L: 45" x W: 24"
Installed at an optimum height of 28"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Moveable

Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex Outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

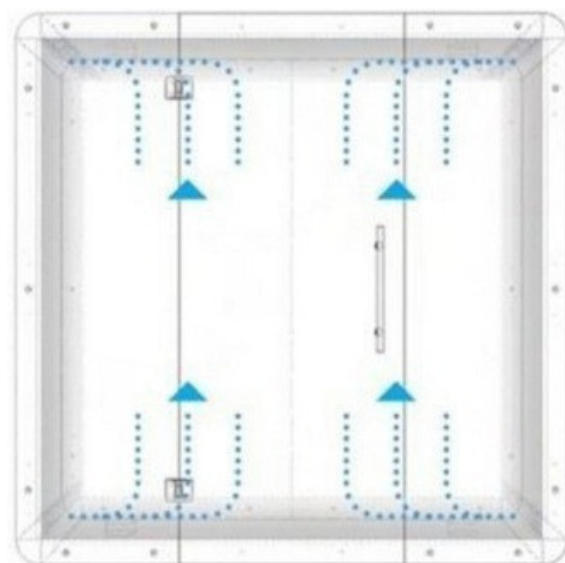

*Air Flow Diagram

