




Because Privacy Matters



Kubebooth Technical Data Sheet - Kteam 6

Extendable

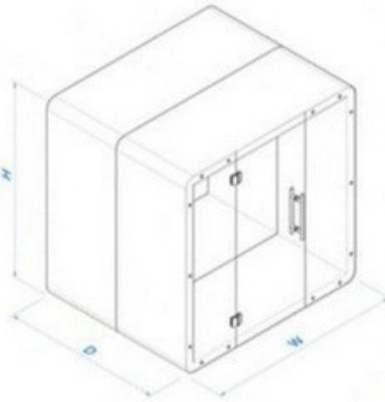

Easy to Install

Size
Overall - W: 88" - D: 109" - H: 88"
Inside - W: 80" - D: 108" - H: 80"

Weight
2400 lbs/1089 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 28"

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel
base.

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D Shape

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

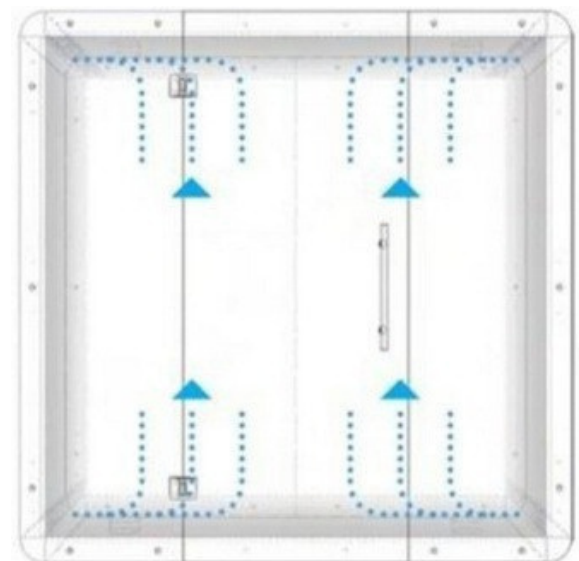

*Air Flow Diagram

