



Because privacy matters!™


ISO 9001:2015 CERTIFIED COMPANY ISO 14001:2015 CERTIFIED COMPANY



Kubebooth Technical Data Sheet KWe

Note: This is only a sample Size. Various Sizes exists to fit your needs

Extendable

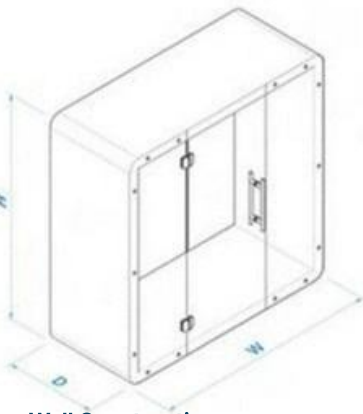

Easy to Install

Size Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 80"

Weight
1200 lbs/544 kg

Glass 10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28 oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel base.

IMPORTANT BUILDING / SPRINKLER NOTE

All units include a sprinkler "knockout" provision. Final requirements vary by jurisdiction and building conditions, customers must confirm the required approach with their building inspector / AHJ (Authority Having Jurisdiction) before installation.

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D shape L: 24" x W:24"
Installed at an optimum height of 28"

Felt

Interior sound absorption panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Plug & Play

Mobility Kit

Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler


Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

UL Certified

The electric connections in this pod are UL certified for safety and reliability

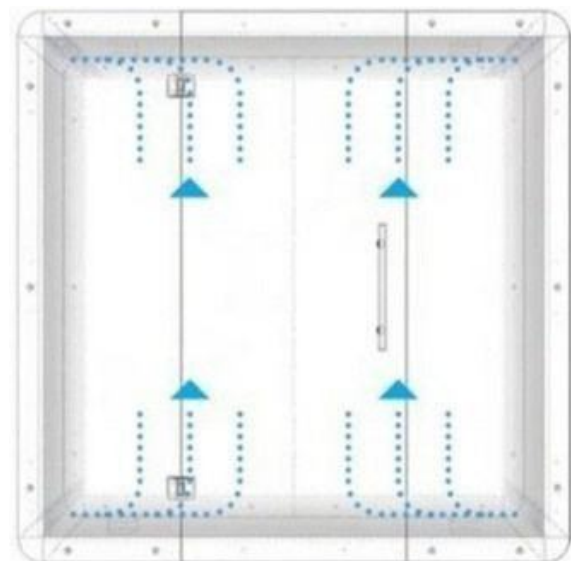

*Air Flow Diagram

