



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kwe Plus



Extendable

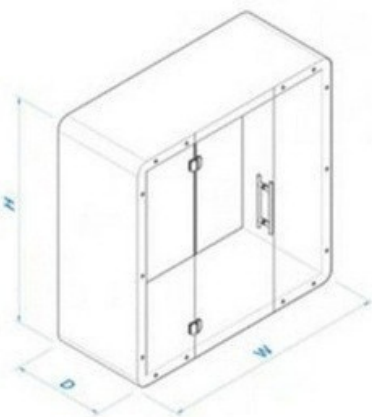

Easy to Install

Size Overall - W: 88" - D: 48" - H: 88"
Inside - W: 80" - D: 47" - H: 80"

Weight

1525 lbs/ 692 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"

Rear Panels - H: 88" x W: 44"

Front Side Panels - H: 88" x W: 26"

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28 oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D shape L: 31" x W: 24"
Installed at an optimum height of 28"

Felt


Interior sound absorption panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Floor Ceiling

Substructure-rated MDF on unitized steel base.

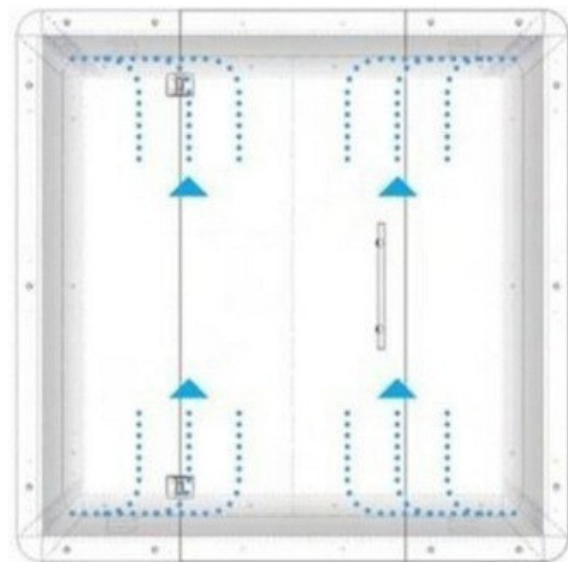

*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9