



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi



Easy to Install

Size
Overall - W: 44" - D: 37" - H: 88"
Inside - W: 36" - D: 36" - H: 80"

Weight

800 lbs/362 kg

Glass

10mm clear tempered
Ceramic painted borders

Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panel - H: 88" x W: 12"

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 air exchanges per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit


Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

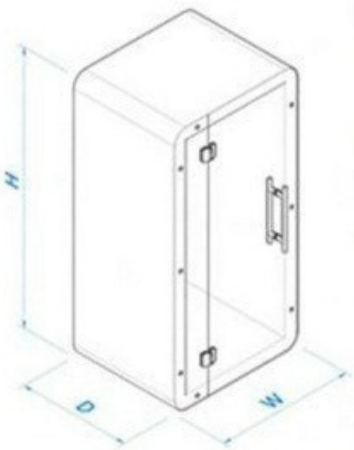

Power Cord 10ft cord 120V/15Amp

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface CARB certified (zero/low
formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Floor Ceiling

Substructure rated MDF on unitized steel base

Reversible Door

Fully interchangeable left or right opening

Worktop


White or black laminate wood worktop
W: 20" x L: 12" Installed at an optimum
height of 40"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights
Height Adjustable Worktop

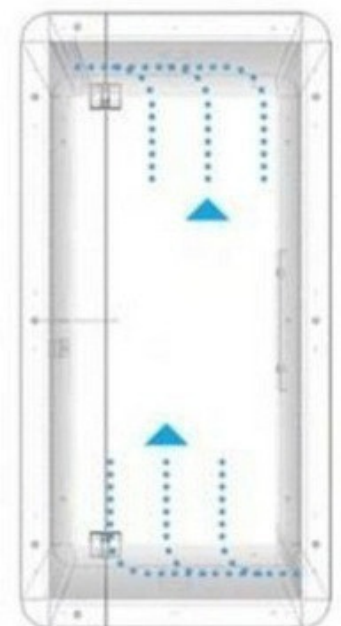

*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi Plus



Easy to Install

Size Overall - W: 56" - D: 48" - H: 88"
Inside - W: 48" - D: 47" - H: 80"

Weight
1000 lbs/453 kg

Glass
10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 32"
Front Side Panels - H: 88" x W: 12"

Moveable

Acoustics
NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange
100 complete air changes per hour

Data Center
UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)


Plug & Play

Mobility Kit
Includes casters with fasteners

Light
12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler Pre-engineered knockout
hole installation 3rd party sprinkler

Power Cord
10ft cord 120V/15Amp

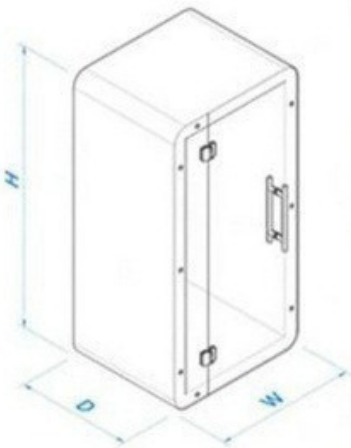

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Floor Ceiling

Substructure rated MDF on unitized steel base


Reversible Door

Fully interchangeable left or right opening

Felt Interior sound absorption
panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glassboard - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass External fire
extinguisher unit
Occupancy lights
Height Adjustable Worktop

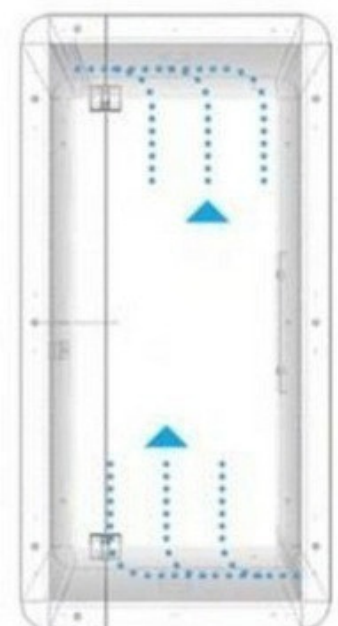

*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kme



Easy to Install

Size

Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 80"

Weight 1200 lbs/544 kg

Glass 10mm clear tempered

Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Floor Ceiling

Substructure-rated MDF on unitized steel base.

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Height Adjustable Table

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for
3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

Wall Construction


Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified (zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall II or equal
Solution dyed polypropylene 28 oz, 10 gauge
GreenGuard certified GLP8472 <450 NBS smoke

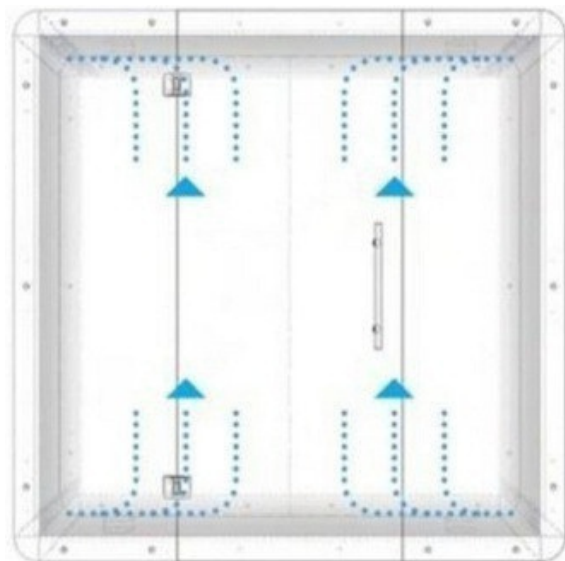

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kme Plus



Easy to Install

Size

Overall - W: 88" - D: 48" - H: 88"
Inside - W: 80" - D: 47" - H: 80"

Weight 1525 lbs/692 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved 1 USB A port,
1 USB C port 2 Simplex outlets
Motion detector (controls light
& fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for
3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

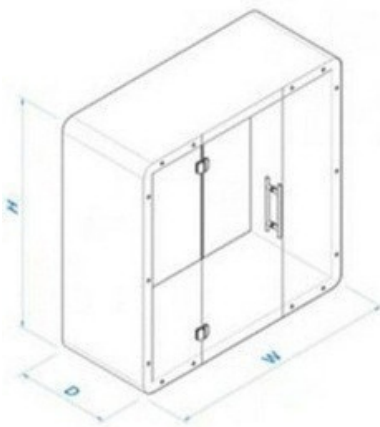

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified (zero/low formaldehyde
emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia Ayers Hall
II or equal
Solution dyed polypropylene 28 oz, 10
gauge
GreenGuard certified GLP8472 <450 NBS
smoke

Reversible Door

Fully interchangeable left or right opening

Floor Ceiling

Substructure-rated MDF on unitized steel
base.


Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Height Adjustable Table

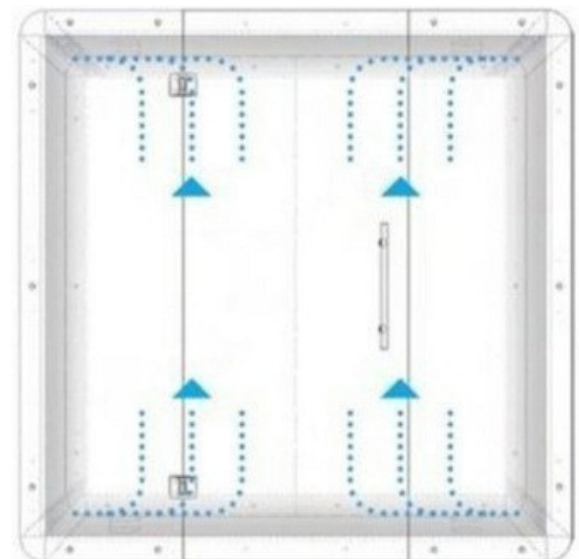

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kwe



Extendable

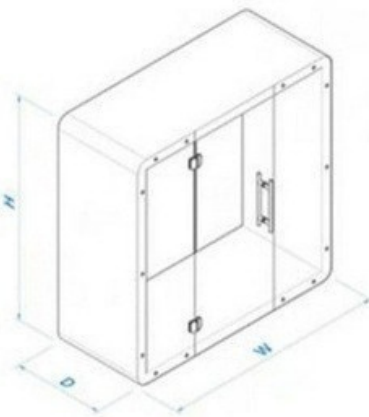

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel
base.

Easy to Install

Size

Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 80"

Weight

1200 lbs/544 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop D
shape L: 24" x W: 24"
Installed at an optimum height of 28"

Felt

Interior sound absorption panels 60%
recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

35" Sofa (customization available)

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light &
fan)

Plug & Play

Mobility Kit

Includes casters with fasteners


Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord 10ft cord 120V/15Amp

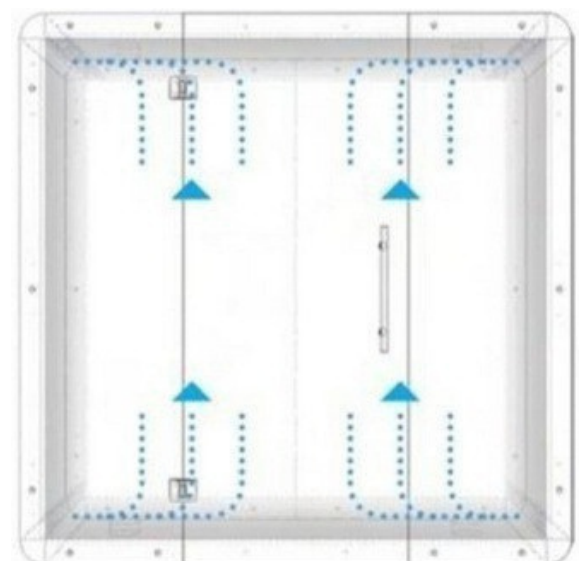

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kwe Plus

Extendable

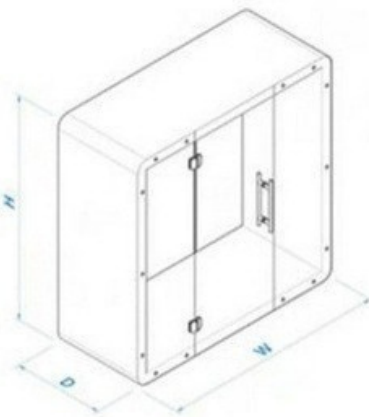

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized
steel base.

Easy to Install

Size

Overall - W: 88" - D: 48" - H: 88"
Inside - W: 80" - D: 47" - H: 80"

Weight

1525 lbs/ 692 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop D
shape L: 31" x W: 24" Installed at an
optimum height of 28"

Felt

Interior sound absorption panels 60%
recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

45" Sofa (customization available)

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved 1 USB A port,
1 USB C port
2 Simplex outlets
Motion detector (controls light &
fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

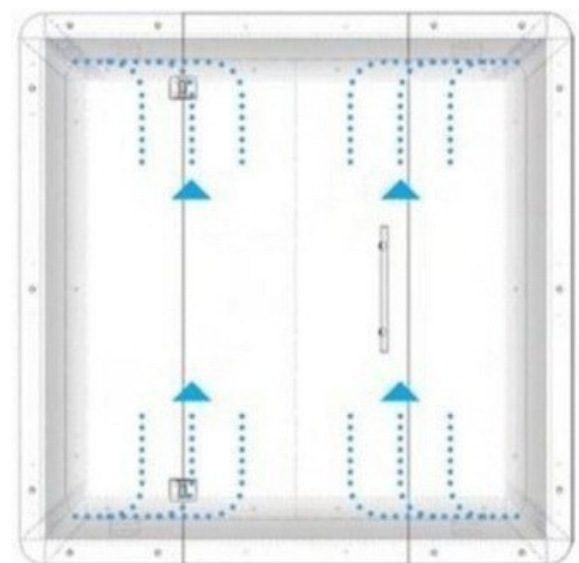

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 4

Extendable

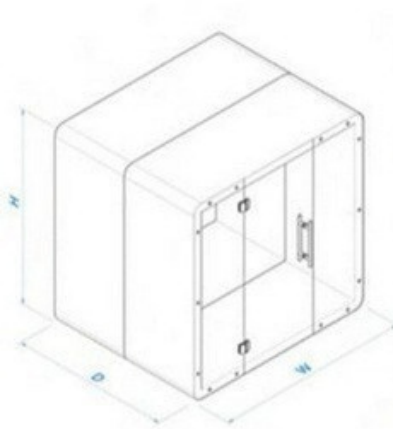

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel
base.

Easy to Install

Size

Overall - W: 88" - D: 73" - H: 88"
Inside - W: 80" - D: 72" - H: 80"

Weight

1800 lbs/816 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop D Shape
L: 45" x W: 24"
Installed at an optimum height of 28"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights
65" Sofa (Customization available)

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex Outlets

Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

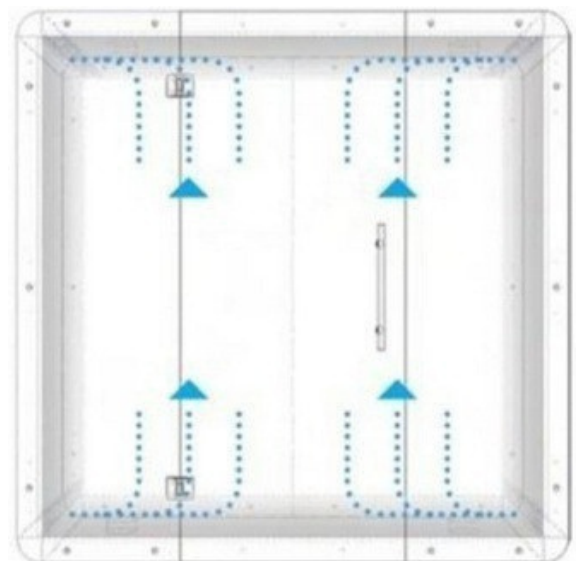

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY




ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 6

Extendable

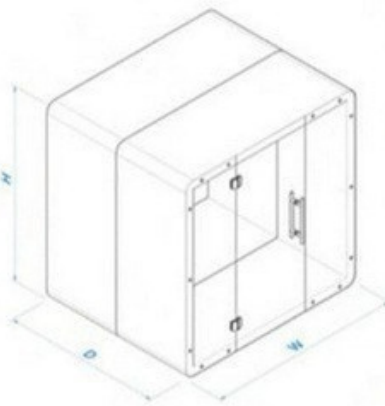

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

D-pull handle
TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia
Ayers Hall II or equal
Solution dyed polypropylene 28
oz, 10 gauge
GreenGuard certified GLP8472
<450 NBS smoke

Floor Ceiling

Substructure-rated MDF on unitized steel
base.

Easy to Install

Size

Overall - W: 88" - D: 109" - H: 88"
Inside - W: 80" - D: 108" - H: 80"

Weight

2400 lbs/1089 kg

Glass

10mm clear tempered
Ceramic painted borders
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D Shape

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Smart lock
Occupancy lights

Moveable

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Plug & Play

Mobility Kit

Includes casters with fasteners

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

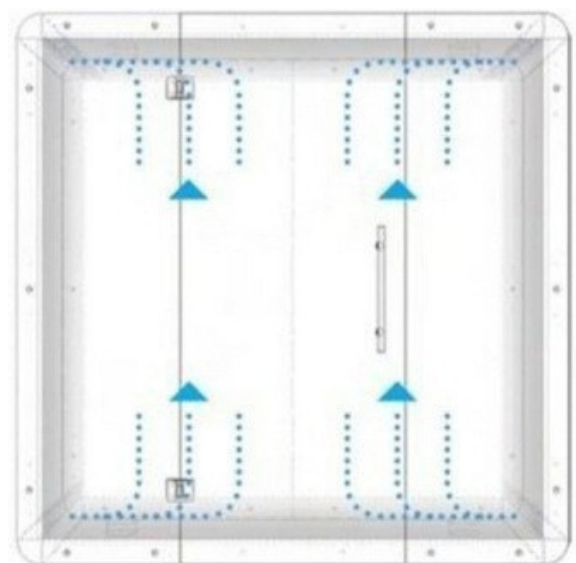

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY




Kubebooth Technical Data Sheet - Kteam 8

Easy to Install

Moveable

Plug & Play

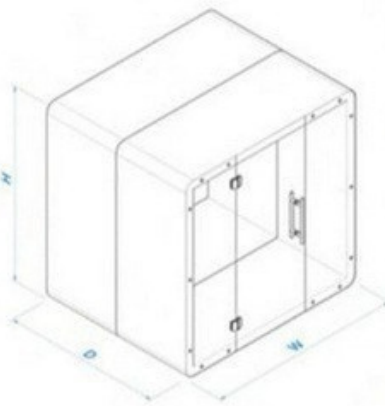

Size

Overall - W: 88" - D: 145" - H: 88"
Inside - W: 80" - D: 144" - H: 80"

Weight

3000 lbs/1361 kg

Glass 10mm clear tempered

Ceramic painted borders

Door - H: 88" x W: 36"

Rear Panels - H: 88" x W: 44"

Front Side Panels - H: 88" x W: 26"

Acoustics

NIC rating of 36 dB certified
Noise cancellation technology

Air Exchange

100 complete air changes per hour

Data Center

UL approved

1 USB A port, 1 USB C port

2 Simplex outlets

Motion detector (controls light & fan)

Mobility Kit

Includes casters with fasteners

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

Wall Construction

Galvanized steel frames

Sound insulation in all cavities

Finishes

D-pull handle

TFL surface

CARB certified

(zero/low formaldehyde emissions)

Aluminum hardware painted

Carpet

Shaw Commercial Philadelphia

Ayers Hall II or equal

Solution dyed polypropylene 28

oz, 10 gauge

GreenGuard certified GLP8472

<450 NBS smoke

Reversible Door Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D Shape

Felt

Interior sound absorption panels

60% recyclable

Options

Seismic bracing

One touch LCD control panel

LCD TV mount bracing

White glass board - W: 34" x L: 30"

Personalized company branding

Ethernet ports


Bluetooth speaker

Frosted film glass

External fire extinguisher unit

Smart lock

Occupancy lights

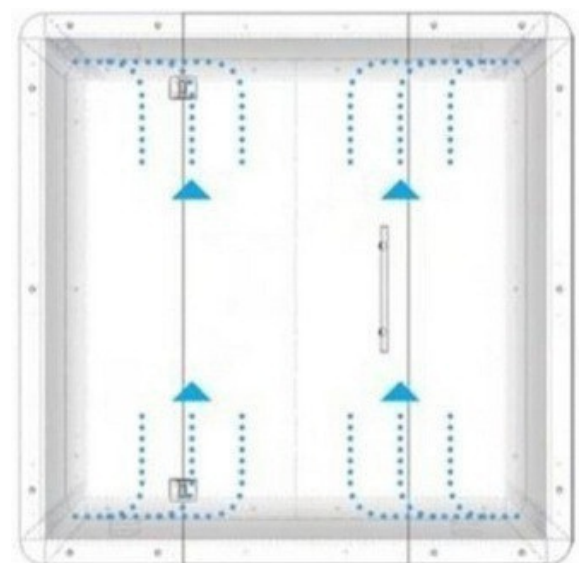

*Air Flow Diagram





Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi Floorless



Easy to Install

Size

Overall - W: 44" - D: 37" - H: 88"
Inside - W: 36" - D: 36" - H: 84"

Weight

750 lbs/340 kg

Glass

10mm clear tempered
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panel - H: 88" x W: 12"

Plug & Play

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop W:
20" x L: 12"
Installed at an optimum height of 40"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker

Frosted film glass

External fire extinguisher unit

Occupancy lights

Height Adjustable Worktop

Power Cord

10ft cord 120V/15Amp

Wall Construction


Galvanized steel frames
Sound insulation in all cavities

Door Lock

Patch fit low noise- silent latch

Finishes

TFL surface
CARB certified (zero/low formaldehyde emissions)
Aluminum hardware painted

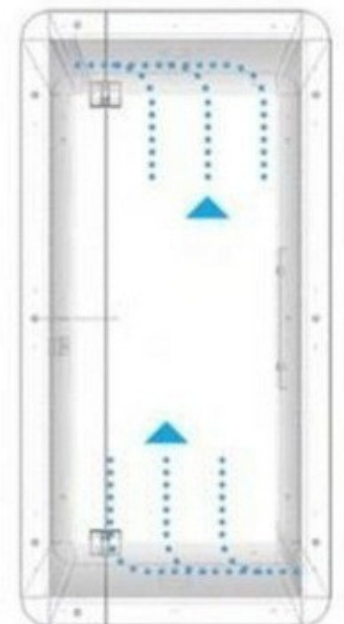

*Air Flow Diagram

Note: For your safety and optimal performance, this phone booth must be securely drilled to the floor during installation.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - KSelfi Plus Floorless

Easy to Install

Plug & Play

Size

Overall - W: 56" - D: 48" - H: 88"
Inside - W: 48" - D: 47" - H: 84"

Weight

950 lbs/431 kg

Glass

10mm clear tempered
Door - H: 88" x W: 32"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 12"
*Panel includes 2 piece glass

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved 1 USB A port, 1 USB C port, 2 Simplex outlets

Motion detector (controls light & fan)

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

Door Lock

Patch fit low noise- silent latch

Reversible Door

Fully interchangeable left or right opening

Felt Interior sound absorption panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Height Adjustable Table

Power Cord 10ft cord 120V/15Amp


Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

TFL surface CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Note: For your safety and optimal performance, this pod must be securely drilled to the floor during installation.

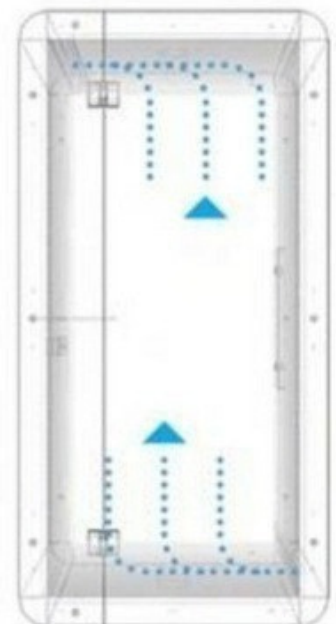

*Air Flow Diagram



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kme Floorless



Easy to Install

Size

Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 84"

Weight

1100 lbs/500 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Plug & Play

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Door Lock

Patch fit low noise- silent latch

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Reversible Door


Fully interchangeable left or right opening

Felt Interior sound absorption
panels 60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Height Adjustable Table

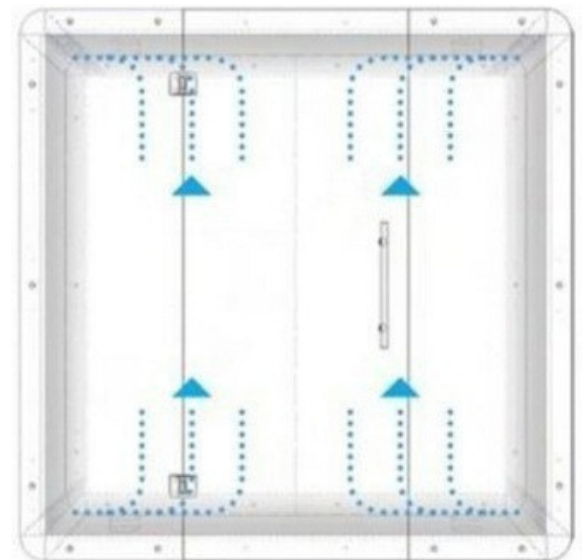

*Air Flow Diagram

Note: This privacy pod requires drilling to the floor as part of standard installation to ensure structural stability and user safety.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kme Plus Floorless



Easy to Install

Size

Overall - W: 88" - D: 48" - H: 88"
Inside - W: 80" - D: 47" - H: 84"

Weight

1150 lbs/527 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panel - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Door Lock

Patch fit low noise- silent latch

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Reversible Door

Fully interchangeable left or right opening

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Occupancy lights

Height Adjustable Table

Plug & Play

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector
(controls light & fan)

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

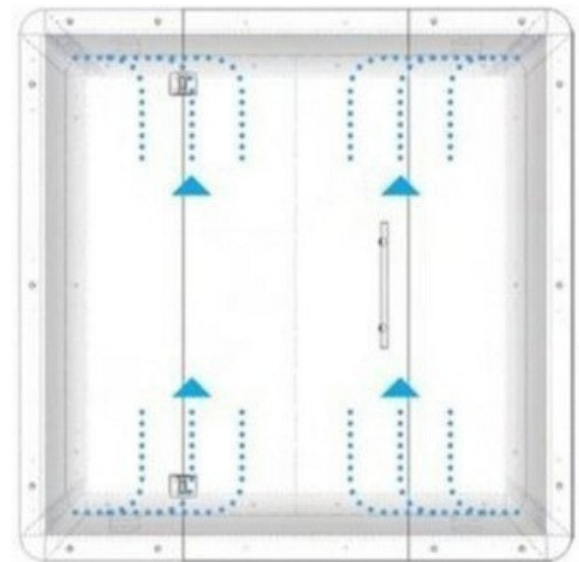

*Air Flow Diagram

Note: This privacy pod requires drilling to the floor as part of standard installation to ensure structural stability and user safety.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kwe Floorless



Extendable

Easy to Install

Plug & Play

Size

Overall - W: 88" - D: 37" - H: 88"
Inside - W: 80" - D: 36" - H: 84"

Weight

1100 lbs/500 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord
10ft cord 120V/15Amp

Data Center

UL approved 1 USB A port,
1 USB C port
2 Simplex outlets
Motion detector
(controls light & fan)

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop D shape L: 24" x W: 24" Installed at an optimum height of 28"

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Door lock
Occupancy lights

35" Sofa (customization available)

Door Lock


Patch fit low noise- silent latch

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

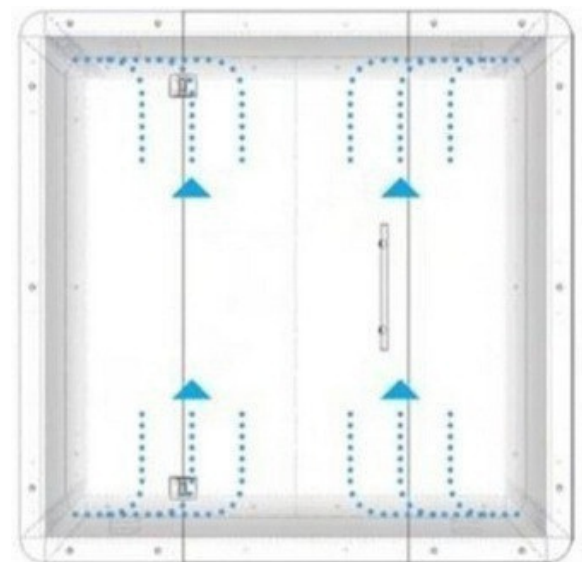

*Air Flow Diagram

Note: This meeting pod must be drilled to the floor to maintain structural integrity and ensure user safety.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kwe Plus Floorless



Extendable

Easy to Install

Plug & Play

Size

Overall - W: 88" - D: 48" - H: 88"
Inside - W: 80" - D: 47" - H: 84"

Weight

1150 lbs/527 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector
(controls light & fan)

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler Pre-engineered knockout
hole for 3rd party sprinkler
installation

Power Cord

10ft cord 120V/15Amp

Reversible Door

Fully interchangeable left or right opening

Worktop

White or Black laminate wood worktop
D shape L: 31" x W: 24"
Installed at an optimum height of 28"

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Door lock
Occupancy lights
45" Sofa (customization available)

Door Lock Patch fit low noise-silent latch

Wall Construction


Galvanized steel frames
Sound insulation in all cavities

Felt

Interior sound absorption panels
60% recyclable

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

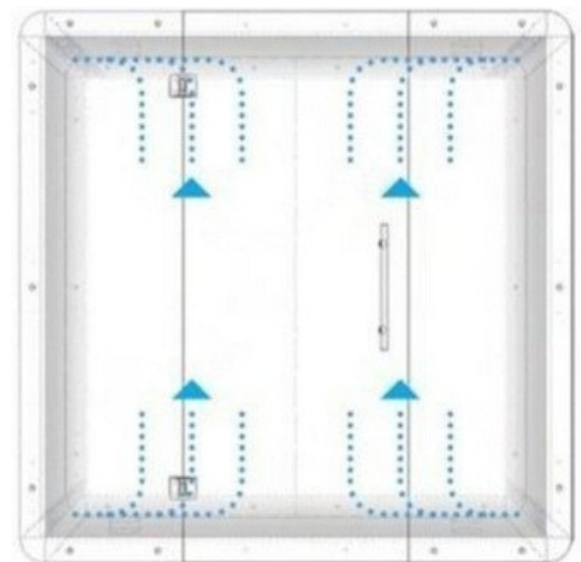

*Air Flow Diagram

Note: This meeting pod must be drilled to the floor to maintain structural integrity and ensure user safety.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 4 Floorless



Extendable

Easy to Install

Plug & Play

Size

Overall - W: 88" - D: 73" - H: 88"
Inside - W: 80" - D: 72" - H: 84"

Weight

1600 lbs/726 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K, 12VDC

Sprinkler

Pre-engineered knockout hole for 3rd party sprinkler installation

Power Cord

10ft cord 120V/15Amp

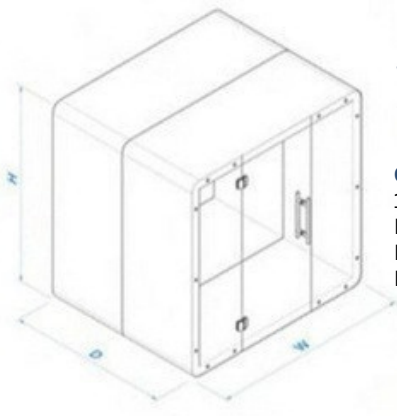

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

TFL surface CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Felt

Interior sound absorption panels
60% recyclable

Door Lock

Patch fit low noise- silent latch

Reversible Door


Fully interchangeable left or right opening

Worktop

White or Black Laminate wood D shape
worktop L: 45" x W: 24"
Installed at an optimum height of 28"

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Door lock
Occupancy lights
65" Sofa (customization available)

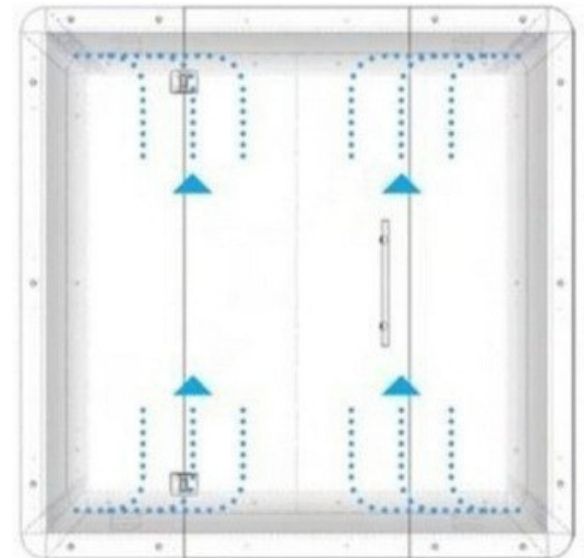

*Air Flow Diagram

Note: This collaborative pod requires drilling to the floor during installation to ensure stability and safety for multiple users.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 6 Floorless



Extendable

Easy to Install

Plug & Play

Size

Overall - W: 88" - D: 109" - H: 88"
Inside - W: 80" - D: 108" - H: 84"

Weight

2100 lbs/953 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Light

12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Worktop

Black or White Laminate wood D
shape worktop

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Door lock
Occupancy lights

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes


TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Door Lock

Patch fit low noise- silent latch

Reversible Door

Fully interchangeable left or
right opening

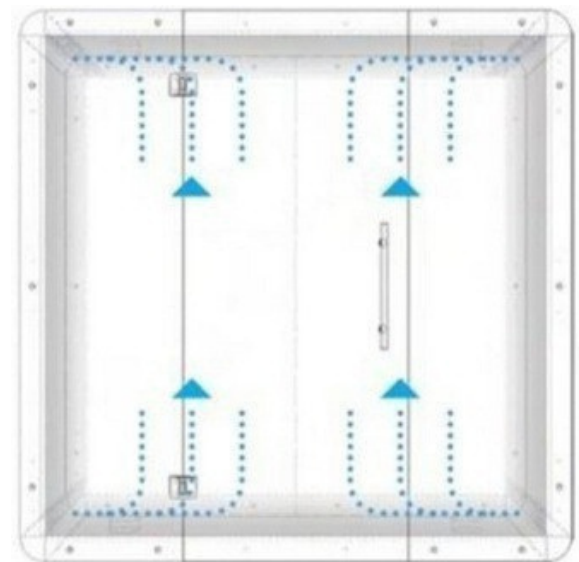

*Air Flow Diagram

Note: This collaborative pod requires drilling to the floor during installation to ensure stability and safety for multiple users.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9



Because Privacy Matters



ISO 9001:2015
CERTIFIED COMPANY



ISO 14001:2015
CERTIFIED COMPANY



Kubebooth Technical Data Sheet - Kteam 8 Floorless

Easy to Install

Plug & Play

Size

Overall - W: 88" - D: 145" - H: 88"
Inside - W: 80" - D: 144" - H: 84"

Weight

2600 lbs/1180 kg

Glass

10mm clear tempered
Door - H: 88" x W: 36"
Rear Panels - H: 88" x W: 44"
Front Side Panels - H: 88" x W: 26"

Acoustics

Class A noise reduction

Air Exchange

100 complete air changes per hour

Data Center

UL approved
1 USB A port, 1 USB C port
2 Simplex outlets
Motion detector (controls light & fan)

Light


12V LED light bar with magnet
570mm/pcs super light bar, 3500K,
12VDC

Sprinkler

Pre-engineered knockout hole for 3rd
party sprinkler installation

Power Cord

10ft cord 120V/15Amp

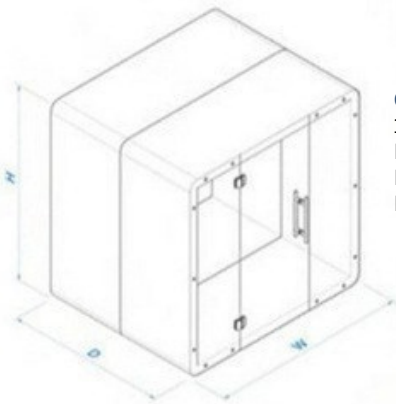

Wall Construction

Galvanized steel frames
Sound insulation in all cavities

Finishes

TFL surface
CARB certified
(zero/low formaldehyde emissions)
Aluminum hardware painted

Door Lock

Patch fit low noise- silent latch

Reversible Door

Fully interchangeable left or right opening

Worktop


Black or White laminate wood D shape
worktop

Felt

Interior sound absorption panels
60% recyclable

Options

Seismic bracing
One touch LCD control panel
LCD TV mount bracing
White glass board - W: 34" x L: 30"
Personalized company branding
Ethernet ports
Bluetooth speaker
Frosted film glass
External fire extinguisher unit
Door lock
Occupancy lights

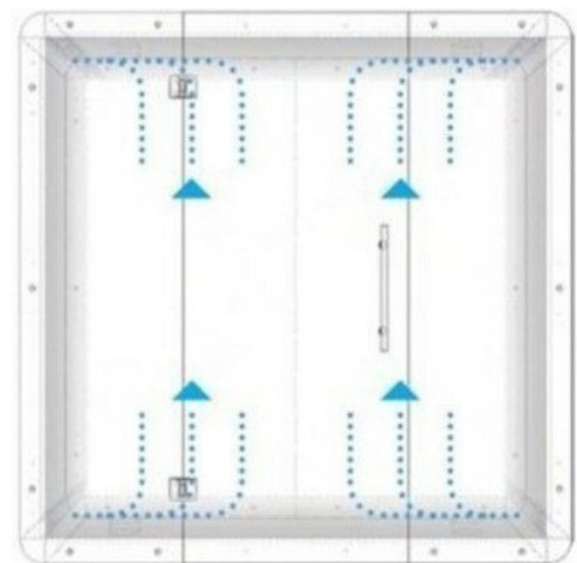

*Air Flow Diagram

Note: This collaborative pod requires drilling to the floor during installation to ensure stability and safety for multiple users.



| www.kubebooth.com | +1 (855) 916-5997, +1 (647) 932-3997 | 40 Penn Drive, Toronto, Ontario, M9L 2A9